
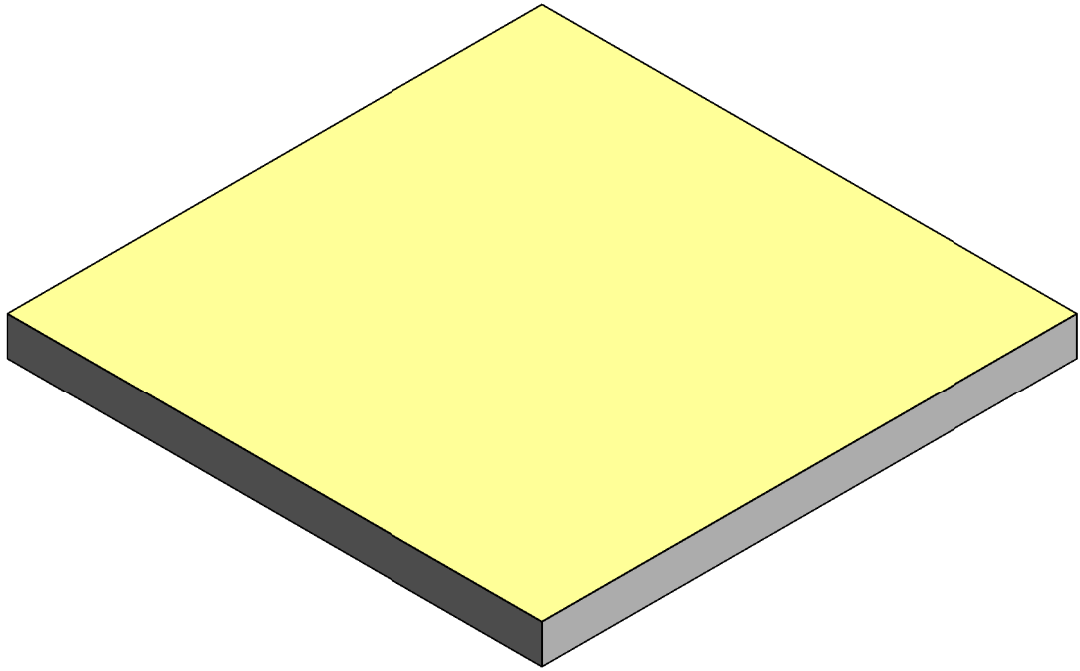


Ceiling Schedule Components quantities																							
Type	Area	Laminated gypsum plasterboard m² / m²	Laminated gypsum plasterboard Total	Ceiling profile 45 m / m²	Ceiling profile 45 Total	Pivot 45 un / m²	Pivot 45 Total	Hanger Rod M6 un / m²	Hanger Rod Total	Screw PM25 un / m²	Screw PM25 Total	Paper tape m / m²	Paper tape Total	Paste GR2 Kg / m²	Paste GR2 Total	Emendation profile un / m²	Emendation profile Total	Border Profile m / m²	Border Profile Total	Mineral wool panel m² / m²	Mineral wool panel Total	Brass bushing un / m²	Brass bushing Total
Gyptec-38-BA13A	1.00 m²	1.05 m²	1.05 m²	2.20	2.20	1.75	2	1	1	10	10	1.90	1.90	0.35	0.35	0.29	0	0.75	0.75	1.06 m²	1.06 m²	1.75	2

LEED Certification - Product Composition (Ceilings)					
Component's name or material	% by weight	Preconsumer recycled %	Postconsumer recycled %	Extraction site	Manufacturer's site
Gypsum	95.2	10	90	Sines PRT	Sines PRT
Paper	4.8	-	100	Lleida ESP	Lleida ESP
Material: Name					

GYPTEC_BA13A gypsum board 12.5mm

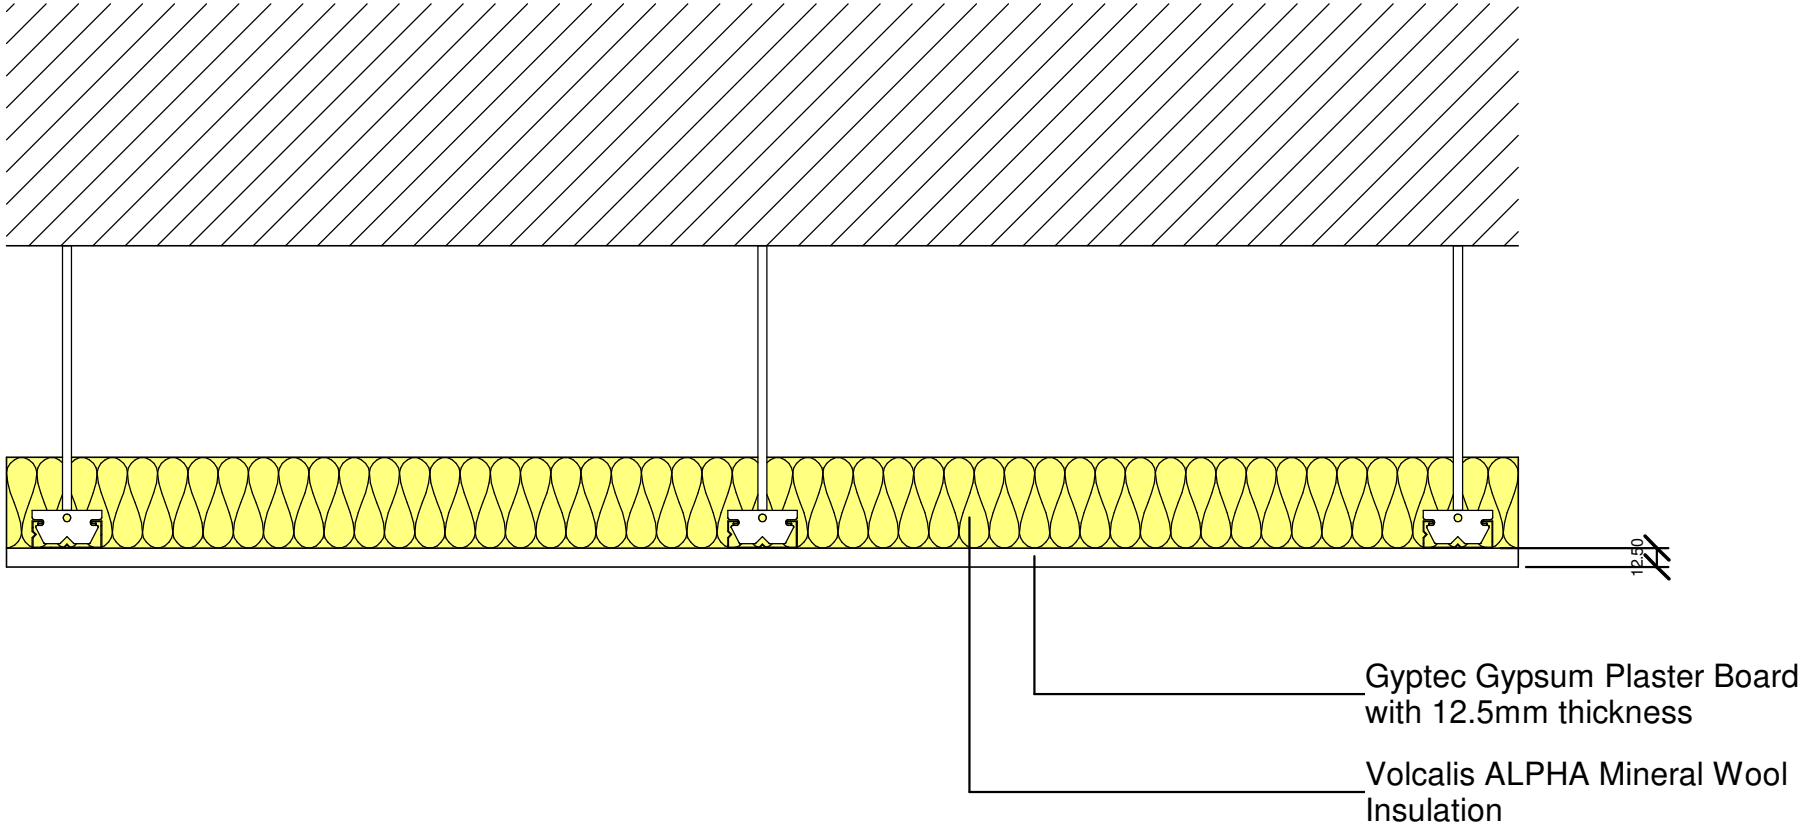

Ceiling Schedule						
Manufacturer	Type	Description	Type Comments	Area	Cost / m²	Total Cost
GYPTEC	Gyptec-38-BA13A	GCDS 38/50 [13A+F530] MW60	Solution for interior ceilings, consisting of a structure with horizontal metal profiles F530 spaced apart every 500 mm, suspended by vertical elements fixed to the ceiling, on which is fixed 1 layer of plates BA13A (STANDARD). Air layer filled with Volcalis ALPHA mineral wool. Surfaces ready for final finishing of painting or decoration.	1.00 m²	0.00	0.00

GYPTEC-38 BA13A

03/2021

V0.2

Developer:

StratBIM