

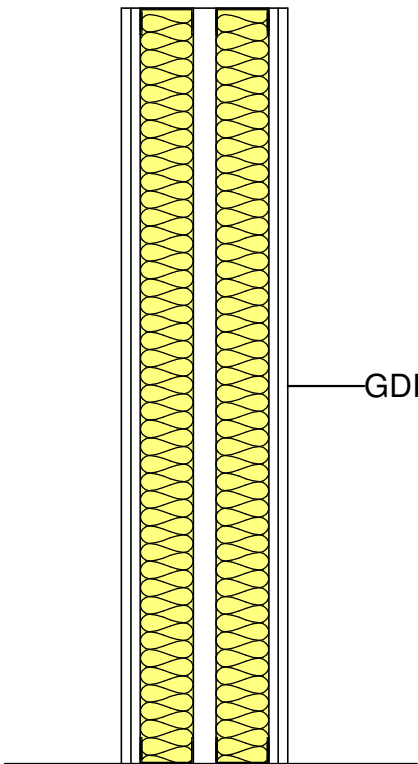


Wall Schedule Components quantities																			
Type	Area	Laminated gypsum plasterboard m² / m²	Laminated gypsum plasterboard Total	Metal frame Raia 70 m / m²	Metal frame Raia 70 Total	Metal frame Montante 70 m / m²	Metal frame Montante 70 Total	Tape 70 m / m²	Tape 70 Total	Paper tape m / m²	Paper tape Total	Paste GR2 Kg / m²	Paste GR2 Total	Screw PM25 un / m²	Screw PM 25 Total	Screw PM35 un / m²	Screw PM 35 Total	Mineral wool panel m² / m²	Minera Wool Panel Total
GYPTEC-220 BA13A	1.00 m²	4.20 m²	4.20 m²	1.90	1.90	4.20	4.20	1.90	1.90	6.00	6.00	1.4	1.4	14	14	28	28	2.12 m²	2.12 m²

LEED Certification - Product Composition					
Component's name or material	% by weight	Preconsumer recycled %	Postconsumer recycled %	Extraction site	Manufacturer's site
Gypsum	95.2	10	90	Sines PRT	Sines PRT
Paper	4.8	-	100	Lleida ESP	Lleida ESP
GYPTEC_BA13A gypsum board 12.5mm					

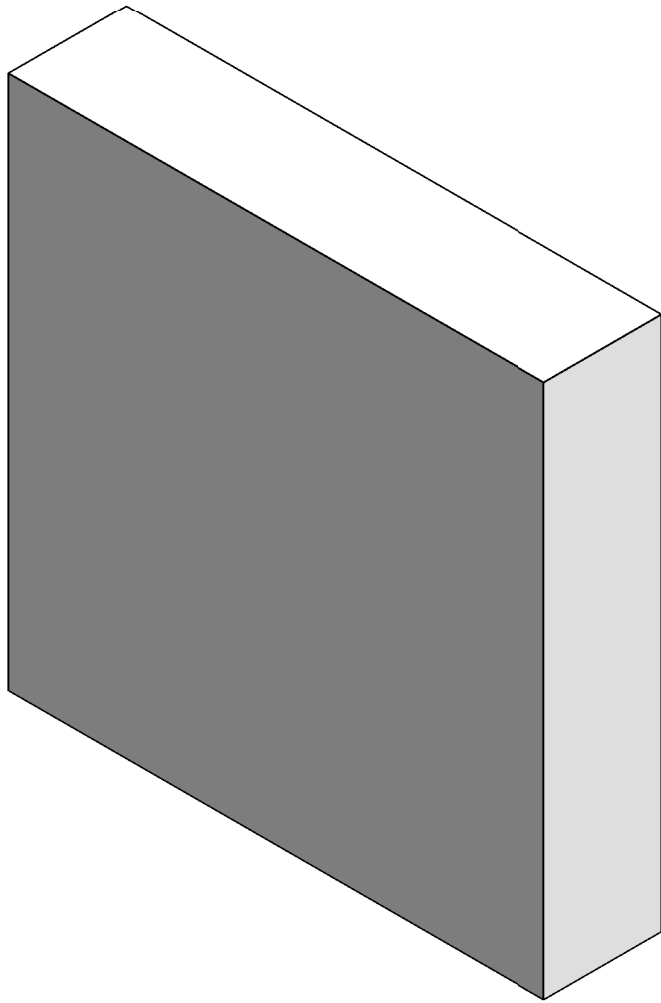

GDIV-0125A-BA13

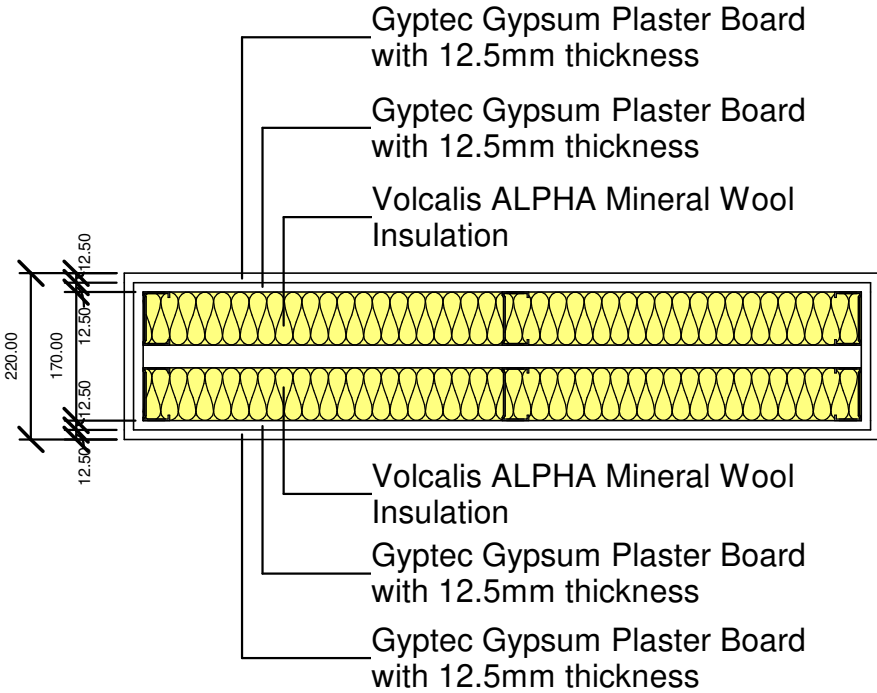

GYPTEC-220 BA13A
03/2021
V0.2

Wall Schedule											
Manufacturer	Type	Function	Description	Type Comments	Weight Kg/m²	Fire Rating	Maximum Height (m)	Acoustic Insulation	Area	Cost / m²	Total Cost
GYPTEC	GYPTEC-220 BA13A	Interior	GDIV 220/600 [2X13A+70(30)+70+2X13A] MW2X60	Solution for internal partition walls, consisting of two independent structures with horizontal metal profiles RAIA 70 and MONTANTE 70, spaced apart every 600 mm, in which 2 layers of Gyptec BA13A (STANDARD) plasterboards are attached on both exterior sides. Air layer filled with Volcalis ALPHA mineral wool. Surfaces ready for final finishing of painting or decoration.	53.5	EI 60	3.20	67dB	1.00 m²	0.00	0.00