
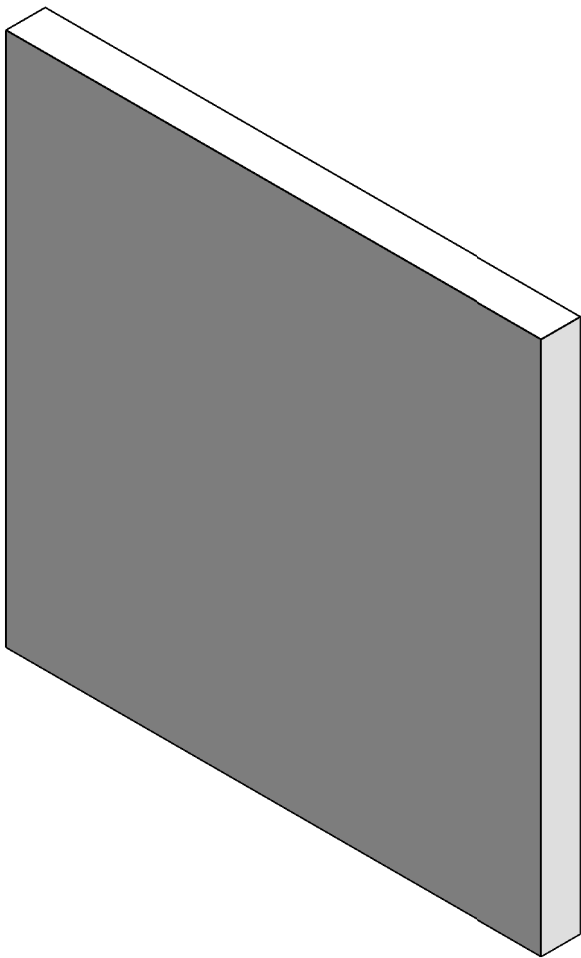
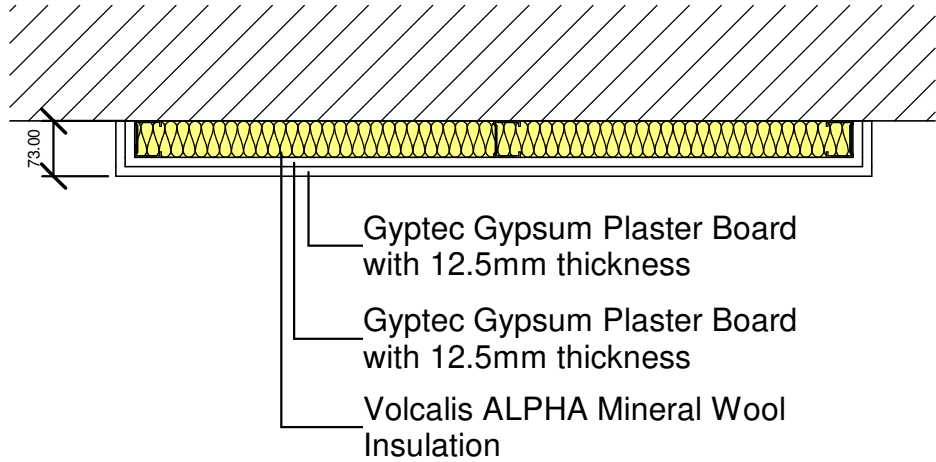


Wall Schedule Components quantities																			
Type	Area	Laminated gypsum plasterboard m² / m²	Laminated gypsum plasterboard Total	Metal frame Raia 70 m / m²	Metal frame Raia 70 Total	Metal frame Montante 70 m / m²	Metal frame Montante 70 Total	Tape 70 m / m²	Tape 70 Total	Paper tape m / m²	Paper tape Total	Paste GR2 Kg / m²	Paste GR2 Total	Screw PM25 un / m²	Screw PM 25 Total	Screw PM35 un / m²	Screw PM 35 Total	Mineral wool panel m² / m²	Minera Wool Panel Total
GYPTEC-73 BA13A	1.00 m²	2.10 m²	2.10 m²	0.95	0.95	2.10	2.10	0.95	0.95	3.00	3.00	0.7	0.7	7	7	14	14	1.06 m²	1.06 m²

LEED Certification - Product Composition					
Component's name or material	% by weight	Preconsumer recycled %	Postconsumer recycled %	Extraction site	Manufacturer's site
Gypsum	95.2	10	90	Sines PRT	Sines PRT
Paper	4.8	-	100	Lleida ESP	Lleida ESP
GYPTEC_ BA13A gypsum board 12.5mm					

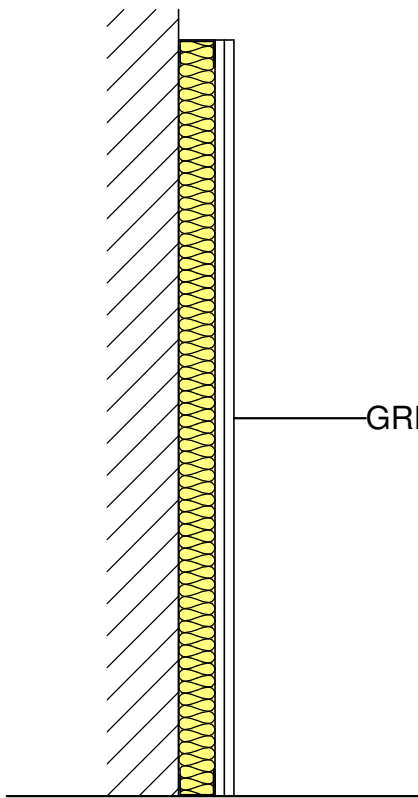

GYPTEC-73 BA13A
03/2021
V0.2

Wall Schedule										
Manufacturer	Type	Function	Description	Type Comments	Weight Kg/m²	Fire Rating	Acoustic Insulation	Area	Cost / m²	Total Cost
GYPTEC	GYPTEC-73 BA13A	Interior	GREV 73/600 [2X13A+48] MW45	Solution for interior lining of masonry walls, consisting of self-supporting structure with horizontal metallic profiles RAIA 48 and vertical MONTANTE 48, spaced every 600 mm, in which 2 layers of Gyptec BA13A (STANDARD) plasterboards are attached. Air layer filled with Volcalis ALPHA mineral wool. Surfaces ready for final finishing of painting or decoration.	24	EI 30	20dB	1.00 m²	0.00	0.00